

CS 2750 Machine Learning

Lecture 1

Machine Learning

Milos Hauskrecht

milos@cs.pitt.edu

5329 Sennott Square, x4-8845

<http://www.cs.pitt.edu/~milos/courses/cs2750/>

CS 2750 Machine Learning

Administration

Instructor:

Milos Hauskrecht

milos@cs.pitt.edu

5329 Sennott Square, x4-8845

TA:

Charmgil Hong

charmgil@cs.pitt.edu

5406 Sennott Square


Office hours: TBA

CS 2750 Machine Learning

Administration

Study material

- Handouts, your notes and course readings
- Primary textbook:



- Chris. Bishop. Pattern Recognition and Machine Learning. Springer, 2006.

CS 2750 Machine Learning

Administration

Study material

- Other books:
 - J. Han, M. Kamber. Data Mining. Morgan Kauffman, 2011.
 - Koller, Friedman. Probabilistic graphical models. MIT Press, 2009.
 - Friedman, Hastie, Tibshirani. Elements of statistical learning. Springer, 2001.
 - Duda, Hart, Stork. Pattern classification. 2nd edition. J Wiley and Sons, 2000.
 - T. Mitchell. Machine Learning. McGraw Hill, 1997.

CS 2750 Machine Learning

Administration

- **Homeworks:** weekly
 - **Programming tool:** Matlab (CSSD machines and labs)
 - **Matlab Tutorial:** next week
- **Exams:**
 - **Midterm** (March)
 - **Final** (April 14-18)
- **Final project:**
 - **Written report + Oral presentation**
(April 21-25)
- **Lectures:**
 - **Attendance and Activity**

CS 2750 Machine Learning

Tentative topics

- Introduction to Machine Learning
- **Density estimation.**
- **Supervised Learning.**
 - Linear models for regression and classification.
 - Multi-layer neural networks.
 - Support vector machines. Kernel methods.
- **Unsupervised Learning.**
 - Learning Bayesian networks.
 - Latent variable models. Expectation maximization.
 - Clustering

CS 2750 Machine Learning

Tentative topics (cont)

- **Dimensionality reduction.**
 - Feature extraction.
 - Principal component analysis (PCA)
- **Ensemble methods.**
 - Mixture models.
 - Bagging and boosting.
- **Reinforcement learning**

CS 2750 Machine Learning

Machine Learning

- The field of **machine learning** studies the design of computer programs (agents) capable of learning from past experience or adapting to changes in the environment
- The need for building agents capable of learning is everywhere
 - predictions in medicine,
 - text and web page classification,
 - speech recognition,
 - image/text retrieval,
 - commercial software

CS 2750 Machine Learning

Learning

Learning process:

Learner (a computer program) processes data D representing past experiences and tries to either develop an appropriate response to future data, or describe in some meaningful way the data seen

Example:

Learner sees a set of patient cases (patient records) with corresponding diagnoses. It can either try:

- to predict the presence of a disease for future patients
- describe the dependencies between diseases, symptoms

CS 2750 Machine Learning

Types of learning

- **Supervised learning**
 - Learning mapping between input x and desired output y
 - Teacher gives me y 's for the learning purposes
- **Unsupervised learning**
 - Learning relations between data components
 - No specific outputs given by a teacher
- **Reinforcement learning**
 - Learning mapping between input x and desired output y
 - Critic does not give me y 's but instead a signal (reinforcement) of how good my answer was
- **Other types of learning:**
 - **Concept learning, Active learning, Transfer learning, Deep learning**

CS 2750 Machine Learning

Supervised learning

Data: $D = \{d_1, d_2, \dots, d_n\}$ a set of n examples

$$d_i = \langle \mathbf{x}_i, y_i \rangle$$

\mathbf{x}_i is input vector, and y is desired output (given by a teacher)

Objective: learn the mapping $f : X \rightarrow Y$

$$\text{s.t. } y_i \approx f(x_i) \text{ for all } i = 1, \dots, n$$


Two types of problems:

- **Regression:** X discrete or continuous \rightarrow
Y is **continuous**
- **Classification:** X discrete or continuous \rightarrow
Y is **discrete**


CS 2750 Machine Learning

Supervised learning examples

- **Regression:** Y is **continuous**



- **Classification:** Y is **discrete**

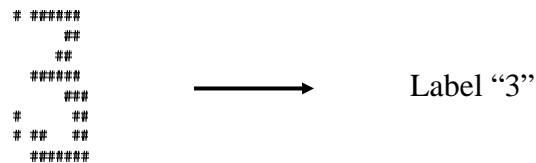

Handwritten digit (array of 0,1s)

CS 2750 Machine Learning

Unsupervised learning

- **Data:** $D = \{d_1, d_2, \dots, d_n\}$
 $d_i = \mathbf{x}_i$ vector of values
No target value (output) y
- **Objective:**
 - learn relations between samples, components of samples


Types of problems:

- **Clustering**
Group together “similar” examples, e.g. patient cases
- **Density estimation**
 - Model probabilistically the population of samples

CS 2750 Machine Learning

Unsupervised learning example


- **Clustering.** Group together similar examples $d_i = \mathbf{x}_i$

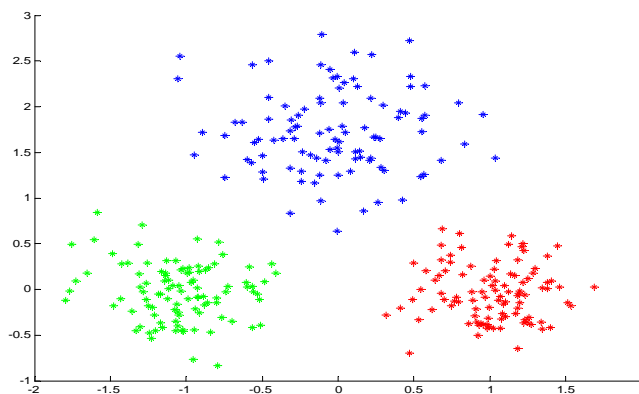

CS 2750 Machine Learning

Unsupervised learning example


- **Clustering.** Group together similar examples $d_i = \mathbf{x}_i$

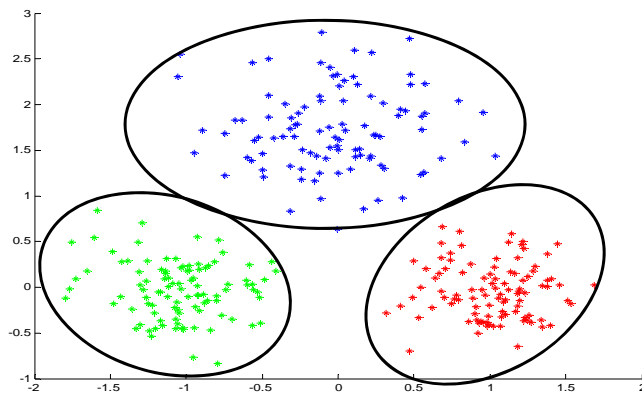

CS 2750 Machine Learning

Unsupervised learning example


- **Density estimation.** We want to build the probability model $P(\mathbf{x})$ of a population from which we draw examples $d_i = \mathbf{x}_i$

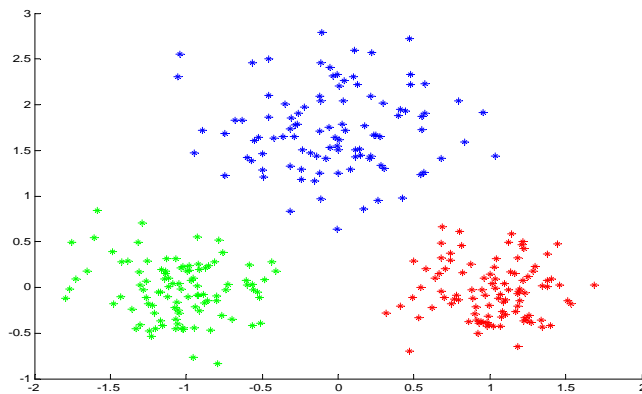

CS 2750 Machine Learning


Unsupervised learning. Density estimation

- A probability density of a point in the two dimensional space
 - Model used here: **Mixture of Gaussians**

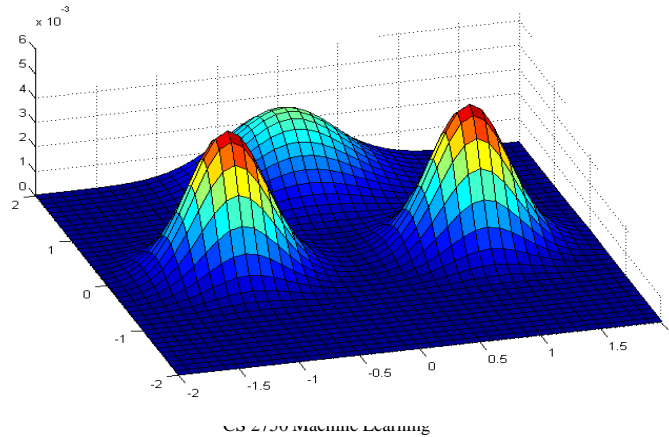

Reinforcement learning


- We want to learn: $f : X \rightarrow Y$
- We see samples of \mathbf{x} but not y
- Instead of y we get a feedback (reinforcement) from a **critic** about how good our output was

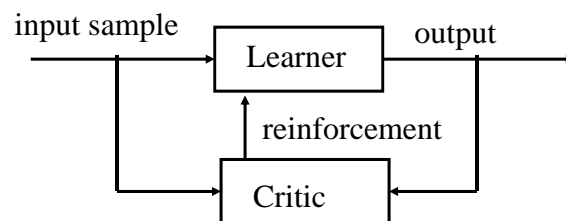

- The goal is to select outputs that lead to the best reinforcement

Learning: first look


- Assume we see examples of pairs (\mathbf{x}, y) in D and we want to learn the mapping $f : X \rightarrow Y$ to predict y for some future \mathbf{x}
- We get the data D - what should we do?

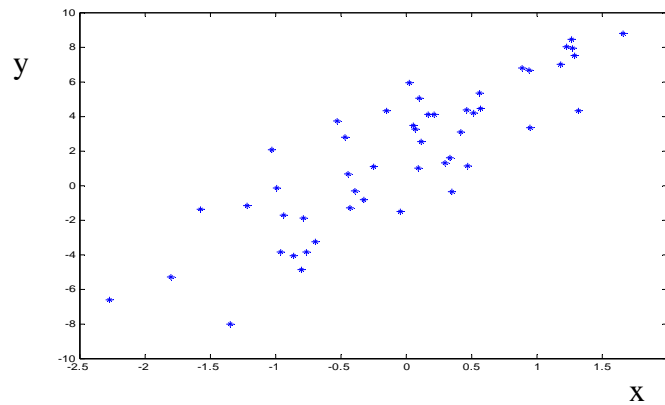

CS 2750 Machine Learning

Learning: first look

- **Problem:** many possible functions $f : X \rightarrow Y$ exists for representing the mapping between \mathbf{x} and y
- Which one to choose? Many examples still unseen!

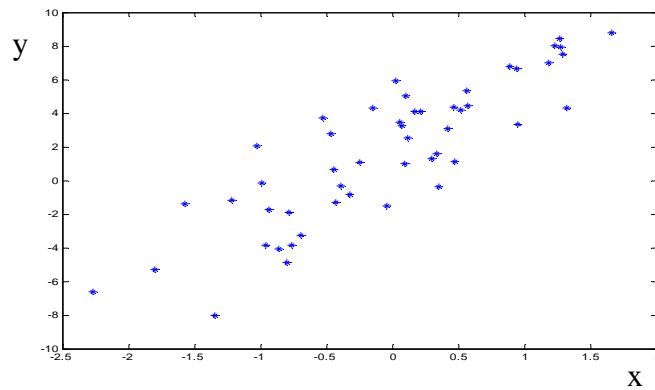


CS 2750 Machine Learning

Learning: first look

- **Solution:** make an assumption about the model, say,

$$f(x) = ax + b + \varepsilon$$


$\varepsilon = N(0, \sigma)$ - random (normally distributed) noise

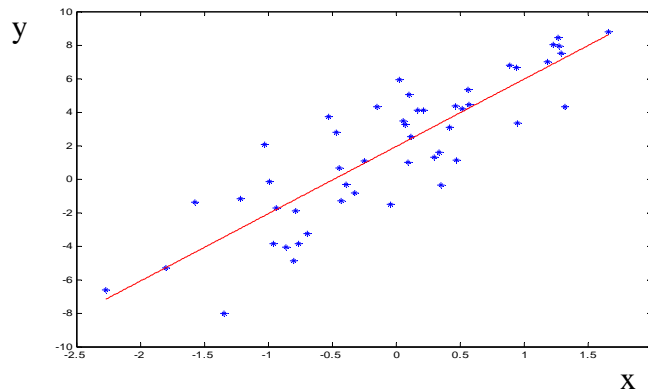

CS 2750 Machine Learning

Learning: first look

- Choosing a parametric model or a set of models is not enough
Still too many functions $f(x) = ax + b + \varepsilon$ $\varepsilon = N(0, \sigma)$
 - One for every pair of parameters a, b

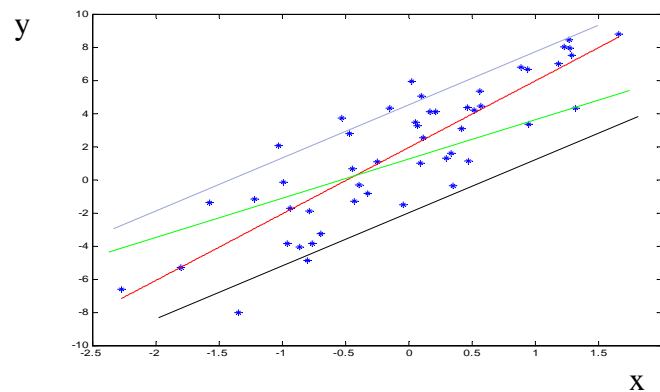

CS 2750 Machine Learning

Fitting the data to the model

- We want the **best set** of model parameters

Objective: Find parameters that:

- reduce the misfit between the model \mathbf{M} and observed data \mathbf{D}
- Or, (in other words) explain the data the best

Objective function:

- **Error function: Measures the misfit between \mathbf{D} and \mathbf{M}**
- **Examples of error functions:**

- Average Square Error $\frac{1}{n} \sum_{i=1}^n (y_i - f(x_i))^2$

- Average misclassification error $\frac{1}{n} \sum_{i=1}^n 1_{y_i \neq f(x_i)}$

Average # of misclassified cases


CS 2750 Machine Learning

Fitting the data to the model

- **Linear regression problem**

- Minimizes the squared error function for the linear model

- minimizes $\frac{1}{n} \sum_{i=1}^n (y_i - f(x_i))^2$

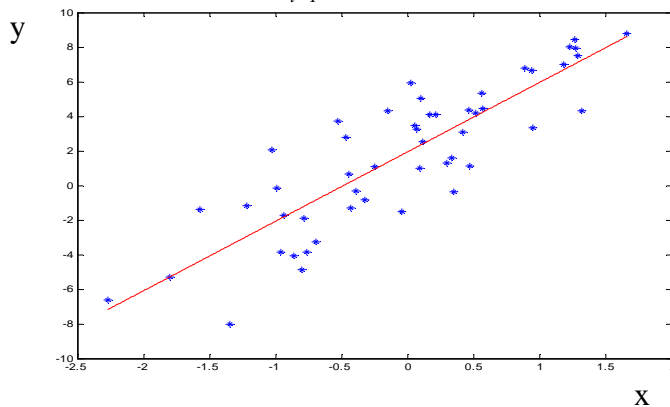

CS 2750 Machine Learning

Learning: summary

Three basic steps:

- **Select a model** or a set of models (with parameters)

E.g. $f(x) = ax + b$

- **Select the error function** to be optimized

E.g. $\frac{1}{n} \sum_{i=1}^n (y_i - f(x_i))^2$

- **Find the set of parameters optimizing the error function**
 - The model and parameters with the smallest error represent the best fit of the model to the data

But there are problems one must be careful about ...

CS 2750 Machine Learning

Learning

Problem

- We fit the model based on past experience (past examples seen)
- But ultimately we are interested in learning the mapping that performs well on the whole population of examples

Training data: Data used to fit the parameters of the model

Training error: $\frac{1}{n} \sum_{i=1}^n (y_i - f(x_i))^2$

True (generalization) error (over the whole unknown population):

$$E_{(x,y)}[(y - f(x))^2] \quad \text{Mean squared error}$$

Training error tries to approximate the true error !!!!

Does a good training error imply a good generalization error ?

CS 2750 Machine Learning

Learning

Problem

- We fit the model based on past examples observed in D
- But ultimately we are interested in learning the mapping that performs well on the whole population of examples

Training data: Data used to fit the parameters of the model

Training error:

$$Error(D, f) = \frac{1}{n} \sum_{i=1}^n (y_i - f(x_i))^2$$

True (generalization) error (over the whole population):

$$E_{(x,y)}[(y - f(x))^2] \quad \text{Mean squared error}$$


Training error tries to approximate the true error !!!!

Does a good training error imply a good generalization error ?

CS 2750 Machine Learning

Overfitting


- Assume we have a set of 10 points and we consider polynomial functions as our possible models

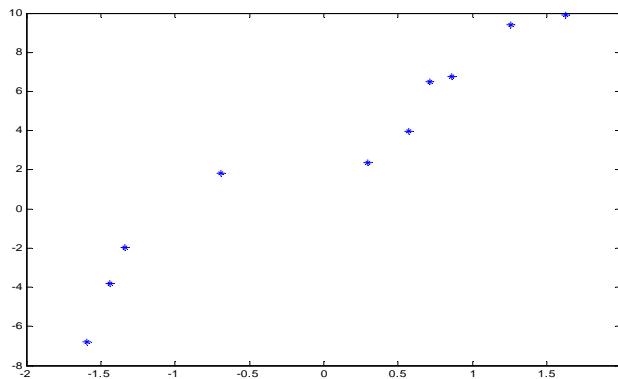

CS 2750 Machine Learning

Overfitting


- Fitting a linear function with the square error
- Error is nonzero

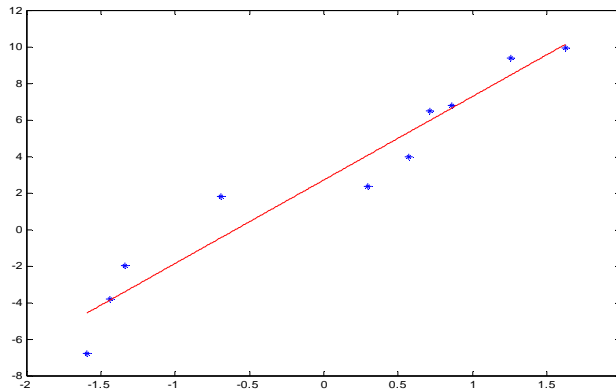

CS 2750 Machine Learning

Overfitting


- Linear vs. cubic polynomial
- Higher order polynomial leads to a better fit, smaller error

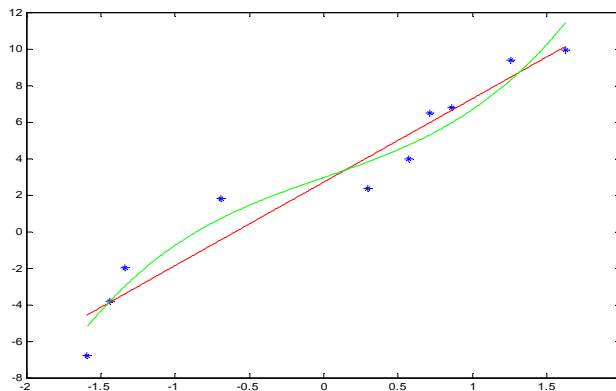

CS 2750 Machine Learning

Overfitting


- Is it always good to minimize the error of the observed data?

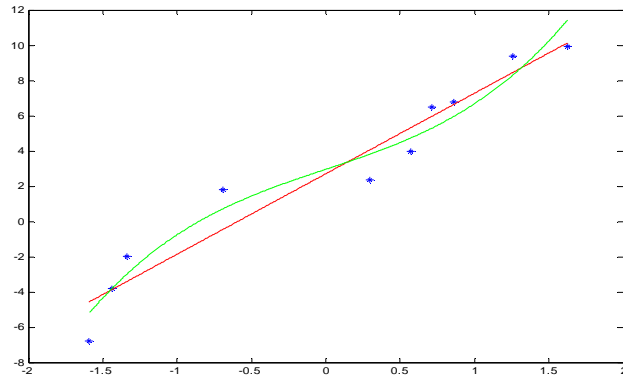

CS 2750 Machine Learning

Overfitting


- For 10 data points, the degree 9 polynomial gives a perfect fit (Lagrange interpolation). Error is zero.
- Is it always good to minimize the training error?

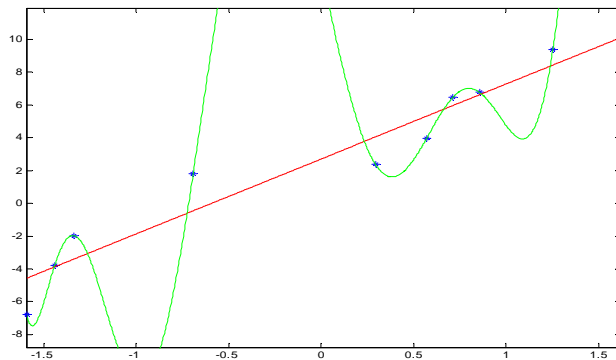

CS 2750 Machine Learning

Overfitting

- For 10 data points, degree 9 polynomial gives a perfect fit (Lagrange interpolation). Error is zero.
- Is it always good to minimize the training error? NO !!
- **More important:** How do we perform on the unseen data?

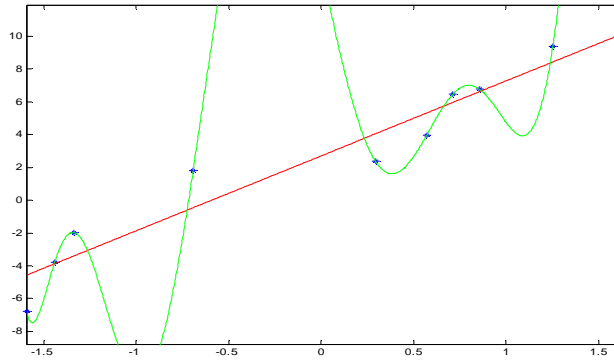


CS 2750 Machine Learning

Overfitting

Situation when the training error is low and the generalization error is high. Causes of the phenomenon:

- Model with a large number of parameters (degrees of freedom)
- Small data size (as compared to the complexity of the model)

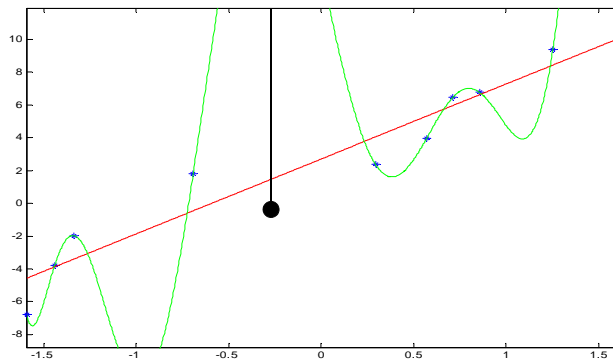

CS 2750 Machine Learning

How to evaluate the learner's performance?

- **Generalization error** is the true error for the population of examples we would like to optimize

$$E_{(x,y)}[(y - f(x))^2]$$

- But it cannot be computed exactly
- **Sample mean only approximates the true mean**

- **Optimizing (mean) training error can lead to the overfit, i.e.** training error may not reflect properly the generalization error

$$\frac{1}{n} \sum_{i=1..n} (y_i - f(x_i))^2$$

- So how to test the generalization error?

CS 2750 Machine Learning

How to evaluate the learner's performance?

- **Generalization error** is the true error for the population of examples we would like to optimize

- **Sample mean only approximates it**
- **Two ways to assess the generalization error is:**

- **Theoretical: Law of Large numbers**

- statistical bounds on the difference between true and sample mean errors

- **Practical:** Use a separate data set with m data samples to test the model


- **(Mean) test error** $\frac{1}{m} \sum_{j=1..m} (y_j - f(x_j))^2$

CS 2750 Machine Learning

Testing of learning models

- **Simple holdout method**

- Divide the data to the training and test data

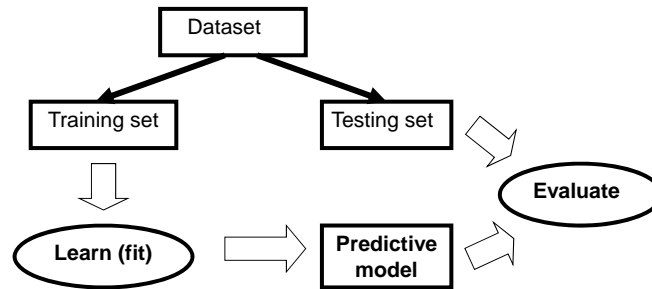

- Typically 2/3 training and 1/3 testing

CS 2750 Machine Learning

Testing of models

