### **Treebanks**

- Treebanks are corpora in which each sentence has been paired with a parse tree (presumably the right one).
- These are generally created
  - By first parsing the collection with an automatic parser
  - And then having human annotators correct each parse as necessary.
- This generally requires detailed annotation guidelines that provide a POS tagset, a grammar and instructions for how to deal with particular grammatical constructions.

1/30/20

Speech and Language Processing - Jurafsky and Martin

48

### Penn Treebank

- Penn TreeBank is a widely used treebank.
- - 1 M words from the 1987-1989 Wall Street Journal.

```
(S-TPC-2
   (NP-SBJ-1 (PRP We) )
  (VP (MD would)
    (VP (VB have)
         (NP-SBJ (-NONE- *-1) )
         (VP (TO to)
           (VP (VB wait)
             (SBAR-TMP (IN until)
                 (NP-SBJ (PRP we) )
                 (VP (VBP have)
                   (VP (VBN collected)
                     (PP-CLR (IN on)
                       (NP (DT those)(NNS assets)))))))))))))
 (, ,) (''')
 (NP-SBJ (PRP he) )
 (VP (VBD said)
   (S (-NONE- *T*-2) ))
 (. .) ))
```

1/30/20

Speech and Language Processing - Jurafsky and Martin

### **Treebank Grammars**

- Treebanks implicitly define a grammar for the language covered in the treebank.
- Simply take the local rules that make up the sub-trees in all the trees in the collection and you have a grammar.
- Not complete, but if you have decent size corpus, you'll have a grammar with decent coverage.

1/30/20

Speech and Language Processing - Jurafsky and Martin

50

### **Treebank Grammars**

- Such grammars tend to be very flat due to the fact that they tend to avoid recursion.
  - To ease the annotators burden
- For example, the Penn Treebank has 4500 different rules for VPs. Among

```
them... VP \rightarrow VBD \ PP
VP \rightarrow VBD \ PP \ PP
VP \rightarrow VBD \ PP \ PP \ PP
VP \rightarrow VBD \ PP \ PP \ PP
```

1/30/20

Speech and Language Processing - Jurafsky and Martin

### **Heads in Trees**


- Finding heads in treebank trees is a task that arises frequently in many applications.
  - Particularly important in statistical parsing
- We can visualize this task by annotating the nodes of a parse tree with the heads of each corresponding node.

1/30/20

Speech and Language Processing - Jurafsky and Martin

52

# **Lexically Decorated Tree**

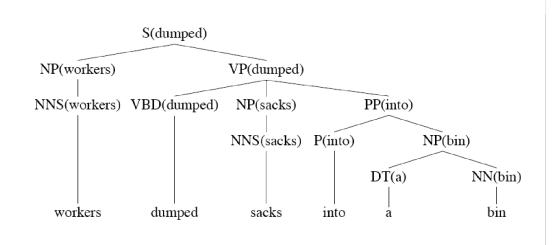

1/30/20


Speech and Language Processing - Jurafsky and Martin

# **Head Finding**

The standard way to do head finding is to use a simple set of tree traversal rules specific to each nonterminal in the grammar.

1/30/20

Speech and Language Processing - Jurafsky and Martin

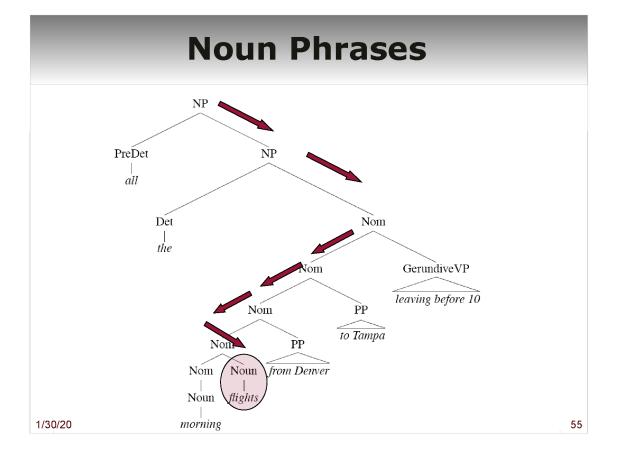

### **Treebank Uses**

- Treebanks (and headfinding) are particularly critical to the development of statistical parsers
  - More later

1/30/20

Speech and Language Processing - Jurafsky and Martin

56

## **Dependency Grammars**

- In CFG-style phrase-structure grammars the main focus is on constituents.
- But it turns out you can get a lot done with just binary relations among the words in an utterance.
- In a dependency grammar framework, a parse is a tree where
  - the nodes stand for the words in an utterance
  - The links between the words represent dependency relations between pairs of words.
    - Relations may be typed (labeled), or not.

1/30/20

Speech and Language Processing - Jurafsky and Martin

### **Summary**

- Context-free grammars can be used to model various facts about the syntax of a language.
- When paired with parsers, such grammars consititute a critical component in many applications.
- Constituency is a key phenomena easily captured with CFG rules.
  - But agreement and subcategorization do pose significant problems
- Treebanks pair sentences in corpus with their corresponding trees.

1/30/20

Speech and Language Processing - Jurafsky and Martin