

CS 1571 Introduction to AI

Lecture 14

Logic reasoning systems

Milos Hauskrecht

milos@cs.pitt.edu

5329 Sennott Square

CS 1571 Intro to AI

Announcements

- **No problem set this week**
- **Midterm exam:**
 - Thursday October 16, 2003
 - In class
 - Closed book
 - Covers Search and Logic
- **Office hours/recitations:**
 - Thursday 2:00-3:30pm
 - Friday 10:00-11:30am

CS 1571 Intro to AI

First-order logic (FOL)

- More expressive than **propositional logic**
- **Eliminates deficiencies of PL by:**
 - Representing objects, their properties, relations and statements about them;
 - Introducing variables that refer to an arbitrary objects and can be substituted by a specific object
 - Introducing quantifiers allowing quantification statements over objects without the need to represent each of them separately

Logical inference in FOL

Logical inference problem:

- Given a knowledge base KB (a set of sentences) and a sentence α , does the KB semantically entail α ?

$$KB \models \alpha \quad ?$$

In other words: In all interpretations in which sentences in the KB are true, is also α true?

Approaches:

- **Truth table** NO
- **Inference rules** YES
 - **Conversion to CNF and resolution refutation**

Unification

- **Problem in inference:** Universal elimination gives many opportunities for substituting variables with ground terms

$$\frac{\forall x \phi(x)}{\phi(a)} \quad a - \text{is a constant symbol}$$

- **Solution:** Try substitutions that may help
 - Use substitutions of “similar” sentences in KB
- **Unification** – takes two similar sentences and computes the substitution that makes them look the same, if it exists

$$UNIFY(p, q) = \sigma \text{ s.t. } SUBST(\sigma, p) = SUBST(\sigma, q)$$

Resolution inference rule in FOL

- **Recall:** Resolution inference rule is sound and complete (refutation-complete) for the **propositional logic** and CNF

$$\frac{A \vee B, \quad \neg A \vee C}{B \vee C}$$

- **Generalized resolution rule is sound and complete** (refutation-complete) for the **first-order logic and CNF w/o equalities**

$$\sigma = UNIFY(\phi_i, \neg \psi_j) \neq fail$$

$$\frac{\phi_1 \vee \phi_2 \dots \vee \phi_k, \quad \psi_1 \vee \psi_2 \vee \dots \vee \psi_n}{SUBST(\sigma, \phi_1 \vee \dots \vee \phi_{i-1} \vee \phi_{i+1} \dots \vee \phi_k \vee \psi_1 \vee \dots \vee \psi_{j-1} \vee \psi_{j+1} \dots \vee \psi_n)}$$

Example:
$$\frac{P(x) \vee Q(x), \quad \neg Q(John) \vee S(y)}{P(John) \vee S(y)}$$

Inference with the resolution rule

- **Proof by refutation:**
 - Prove that $KB, \neg \alpha$ is **unsatisfiable**
 - resolution is **refutation-complete**
- **Main procedure (steps):**
 1. Convert $KB, \neg \alpha$ to CNF with ground terms and universal variables only
 2. Apply repeatedly the resolution rule while keeping track and consistency of substitutions
 3. Stop when empty set (contradiction) is derived or no more new resolvents (conclusions) follow

Conversions to CNF

1. Eliminate implications, equivalences

$$(p \Rightarrow q) \rightarrow (\neg p \vee q)$$

2. Move negations inside (DeMorgan's Laws, double negation)

$$\neg(p \wedge q) \rightarrow \neg p \vee \neg q$$

$$\neg(p \vee q) \rightarrow \neg p \wedge \neg q$$

$$\neg \forall x p \rightarrow \exists x \neg p$$

$$\neg \exists x p \rightarrow \forall x \neg p$$

$$\neg \neg p \rightarrow p$$

3. Standardize variables (rename duplicate variables)

$$(\forall x P(x)) \vee (\exists x Q(x)) \rightarrow (\forall x P(x)) \vee (\exists y Q(y))$$

Conversion to CNF

4. Move all quantifiers left (no invalid capture possible)

$$(\forall x P(x)) \vee (\exists y Q(y)) \rightarrow \forall x \exists y P(x) \vee Q(y)$$

5. Skolemization (removal of existential quantifiers through elimination)

- If no universal quantifier occurs before the existential quantifier, replace the variable with a new constant symbol

$$\exists y P(A) \vee Q(y) \rightarrow P(A) \vee Q(B)$$

- If a universal quantifier precedes the existential quantifier replace the variable with a function of the “universal” variable

$$\forall x \exists y P(x) \vee Q(y) \rightarrow \forall x P(x) \vee Q(F(x))$$

$F(x)$ - a Skolem function

Conversion to CNF

6. Drop universal quantifiers (all variables are universally quantified)

$$\forall x P(x) \vee Q(F(x)) \rightarrow P(x) \vee Q(F(x))$$

7. Convert to CNF using the distributive laws

$$p \vee (q \wedge r) \rightarrow (p \vee q) \wedge (p \vee r)$$

The result is a CNF with variables, constants, functions

Resolution example

KB

$\neg \alpha$

$\neg P(w) \vee Q(w), \neg Q(y) \vee S(y), P(x) \vee R(x), \neg R(z) \vee S(z), \neg S(A)$

CS 1571 Intro to AI

Resolution example

KB


$\neg \alpha$

$\neg P(w) \vee Q(w), \neg Q(y) \vee S(y), P(x) \vee R(x), \neg R(z) \vee S(z), \neg S(A)$


$\neg P(w) \vee S(w)$
 $\{y / w\}$

CS 1571 Intro to AI


Resolution example

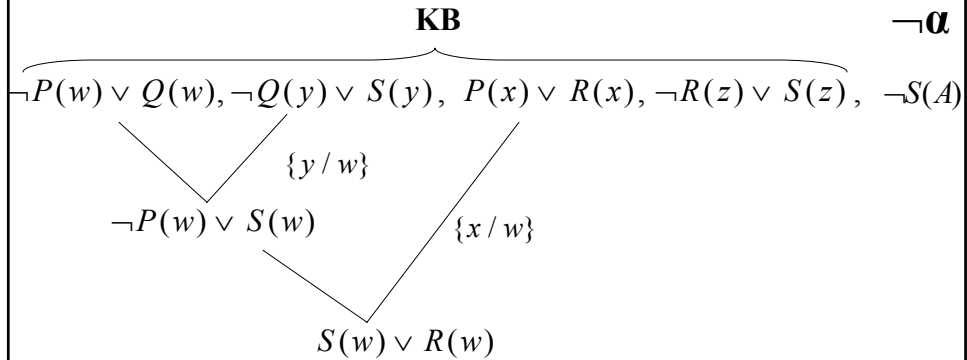

Resolution example

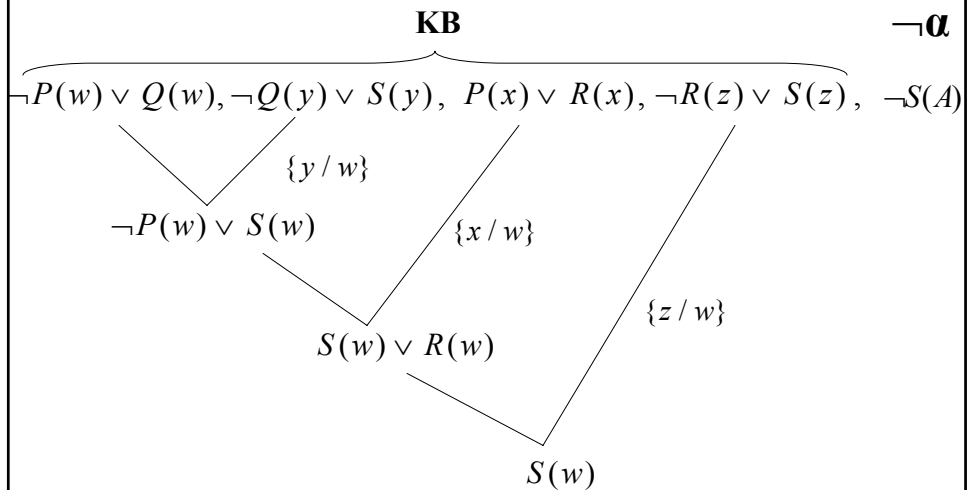

Resolution example

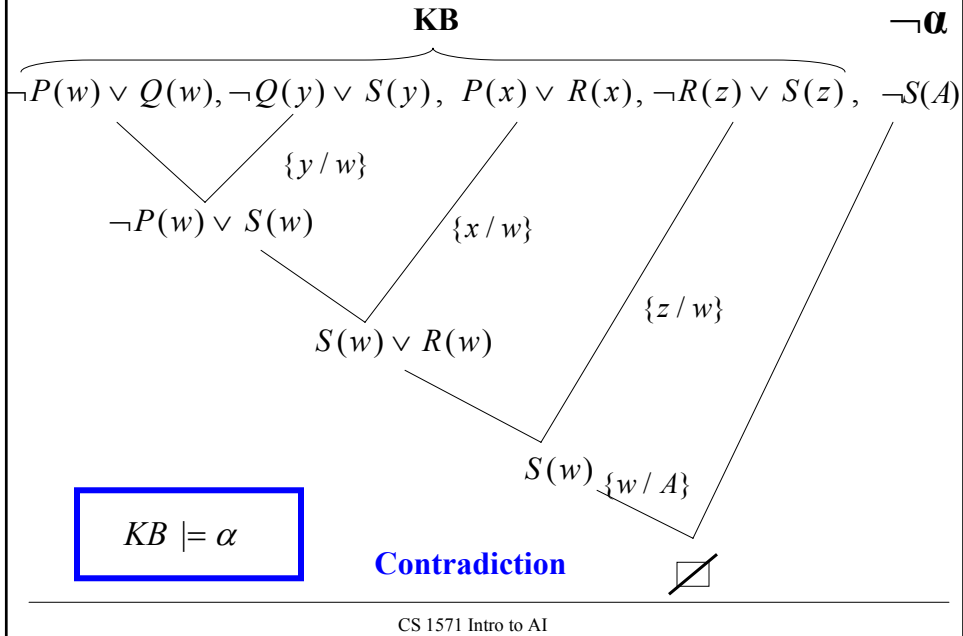

Dealing with equality

- Resolution works for first-order logic without equalities
- To incorporate equalities we need an additional inference rule
- **Demodulation rule**

$\sigma = \text{UNIFY}(\phi_i, t_1) \neq \text{fail}$

$$\frac{\phi_1 \vee \phi_2 \dots \vee \phi_k, \quad t_1 = t_2}{\text{SUBST}(\{\text{SUBST}(\sigma, t_1) / \text{SUBST}(\sigma, t_2)\}, \phi_1 \vee \dots \vee \phi_{i-1} \vee \phi_{i+1} \dots \vee \phi_k)}$$

- **Example:**
$$\frac{P(f(a)), f(x) = x}{P(a)}$$
- **Paramodulation rule:** more powerful
- **Resolution+paramodulation** give a refutation-complete proof theory for FOL

Sentences in Horn normal form

- **Horn normal form (HNF) in the propositional logic**
 - a special type of clause with **at most one positive literal**

$$(A \vee \neg B) \wedge (\neg A \vee \neg C \vee D) \wedge A$$

Can be written as:

$$(B \Rightarrow A) \wedge ((A \wedge C) \Rightarrow D) \wedge A$$

- A clause with one literal, is also called **a fact**
Example: A **is a fact**
- A clause representing an implication (with a conjunction of positive literals in antecedent and one positive literal in consequent), is also called **a rule**
Example: $(A \wedge C) \Rightarrow D$ **is a rule**

Sentences in Horn normal form

- **Horn normal form (HNF) in the propositional logic**
 - a special type of clause with **at most one positive literal**

$$(A \vee \neg B) \wedge (\neg A \vee \neg C \vee D) \wedge A$$

Can be written as:

$$(B \Rightarrow A) \wedge ((A \wedge C) \Rightarrow D) \wedge A$$

- **Modus ponens:**
$$\frac{A \Rightarrow B, \quad A}{B}$$
 - is the **complete inference rule** for KBs in the Horn normal form.

Horn normal form in FOL

First-order logic (FOL)

- adds variables and quantifiers, works with terms

Generalized modus ponens rule:

σ = a substitution s.t. $\forall i \text{ } SUBST(\sigma, \phi_i') = SUBST(\sigma, \phi_i)$

$$\frac{\phi_1', \phi_2' \dots, \phi_n', \quad \phi_1 \wedge \phi_2 \wedge \dots \phi_n \Rightarrow \tau}{SUBST(\sigma, \tau)}$$

Generalized modus ponens:

- is **complete** for the KBs with sentences in the Horn form;
- Not all first-order logic sentences can be expressed in this form

Forward and backward chaining

Two inference procedures based on modus ponens for **Horn KBs**:

- **Forward chaining**

Idea: Whenever the premises of a rule are satisfied, infer the conclusion. Continue with rules that became satisfied.

Typical usage: If we want to infer all sentences entailed by the existing KB.

- **Backward chaining (goal reduction)**

Idea: To prove the fact that appears in the conclusion of a rule prove the premises of the rule. Continue recursively.

Typical usage: If we want to prove that the target (goal) sentence α is entailed by the existing KB.

Both procedures are **complete for KBs in Horn form !!!**

Forward chaining example

- **Forward chaining**

Idea: Whenever the premises of a rule are satisfied, infer the conclusion. Continue with rules that became satisfied

Assume the KB with the following rules:

KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$

R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$

R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$

F2: $\text{Sailboat}(\text{Mistral})$

F3: $\text{RowBoat}(\text{PondArrow})$

Theorem: $\text{Faster}(\text{Titanic}, \text{PondArrow})$
--

?

CS 1571 Intro to AI

Forward chaining example

KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$

R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$

R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$

F2: $\text{Sailboat}(\text{Mistral})$

F3: $\text{RowBoat}(\text{PondArrow})$

?


CS 1571 Intro to AI

Forward chaining example

KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$
R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$
R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$
F2: $\text{Sailboat}(\text{Mistral})$
F3: $\text{RowBoat}(\text{PondArrow})$

Rule R1 is satisfied:


F4: $\text{Faster}(\text{Titanic}, \text{Mistral})$ 

Forward chaining example

KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$
R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$
R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$
F2: $\text{Sailboat}(\text{Mistral})$
F3: $\text{RowBoat}(\text{PondArrow})$

Rule R1 is satisfied:

F4: $\text{Faster}(\text{Titanic}, \text{Mistral})$ 

Rule R2 is satisfied:

F5: $\text{Faster}(\text{Mistral}, \text{PondArrow})$ 

Forward chaining example

KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$
R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$
R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$
F2: $\text{Sailboat}(\text{Mistral})$
F3: $\text{RowBoat}(\text{PondArrow})$

Rule R1 is satisfied:

F4: $\text{Faster}(\text{Titanic}, \text{Mistral})$ ←

Rule R2 is satisfied:

F5: $\text{Faster}(\text{Mistral}, \text{PondArrow})$ ←

Rule R3 is satisfied:

F6: $\text{Faster}(\text{Titanic}, \text{PondArrow})$ ←

CS 1571 Intro to AI

Backward chaining example

- Backward chaining (goal reduction)**

Idea: To prove the fact that appears in the conclusion of a rule prove the antecedents (if part) of the rule & repeat recursively.


KB: R1: $\text{Steamboat}(x) \wedge \text{Sailboat}(y) \Rightarrow \text{Faster}(x, y)$
R2: $\text{Sailboat}(y) \wedge \text{RowBoat}(z) \Rightarrow \text{Faster}(y, z)$
R3: $\text{Faster}(x, y) \wedge \text{Faster}(y, z) \Rightarrow \text{Faster}(x, z)$

F1: $\text{Steamboat}(\text{Titanic})$
F2: $\text{Sailboat}(\text{Mistral})$
F3: $\text{RowBoat}(\text{PondArrow})$

Theorem: $\text{Faster}(\text{Titanic}, \text{PondArrow})$

CS 1571 Intro to AI

Backward chaining example

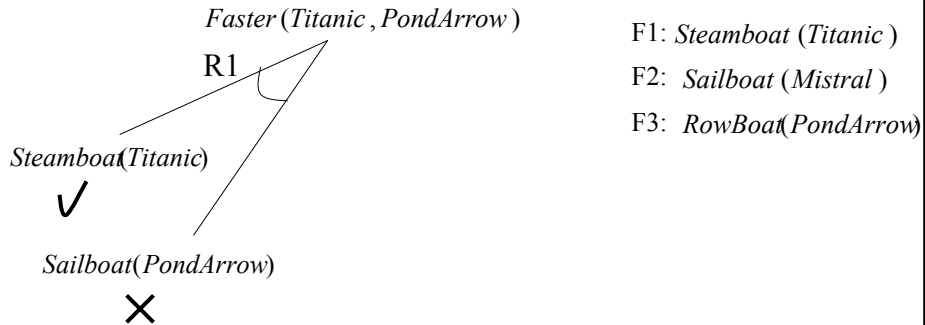


F1: *Steamboat (Titanic)*
 F2: *Sailboat (Mistral)*
 F3: *RowBoat(PondArrow)*

$Steamboat(x) \wedge Sailboat(y) \Rightarrow Faster(x, y)$
 $\{x / Titanic, y / PondArrow\}$

CS 1571 Intro to AI

Backward chaining example

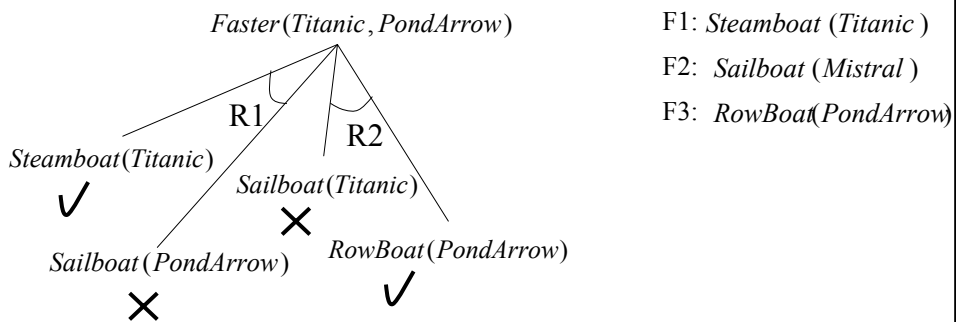


F1: *Steamboat (Titanic)*
 F2: *Sailboat (Mistral)*
 F3: *RowBoat(PondArrow)*

$Sailboat(y) \wedge RowBoat(z) \Rightarrow Faster(y, z)$
 $\{y / Titanic, z / PondArrow\}$


CS 1571 Intro to AI

Backward chaining example

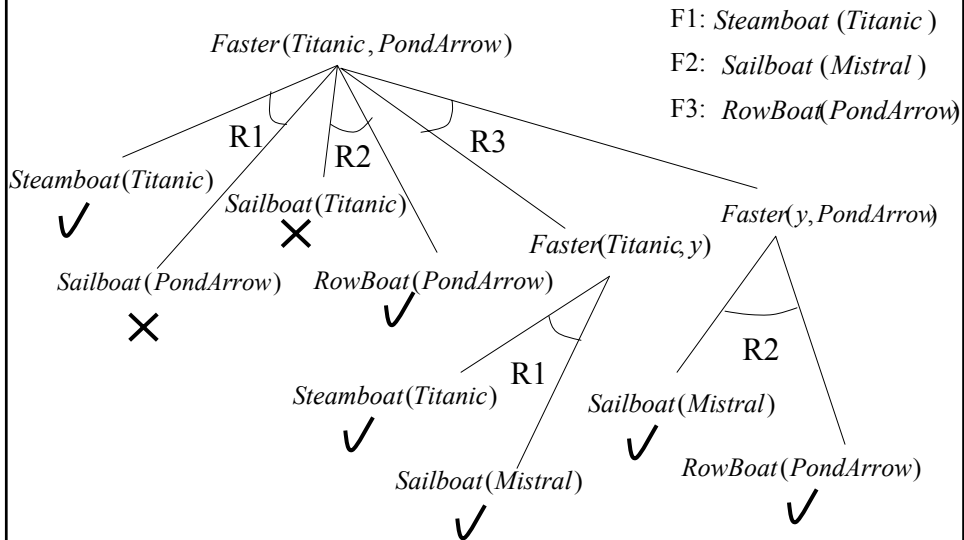

CS 1571 Intro to AI


Backward chaining

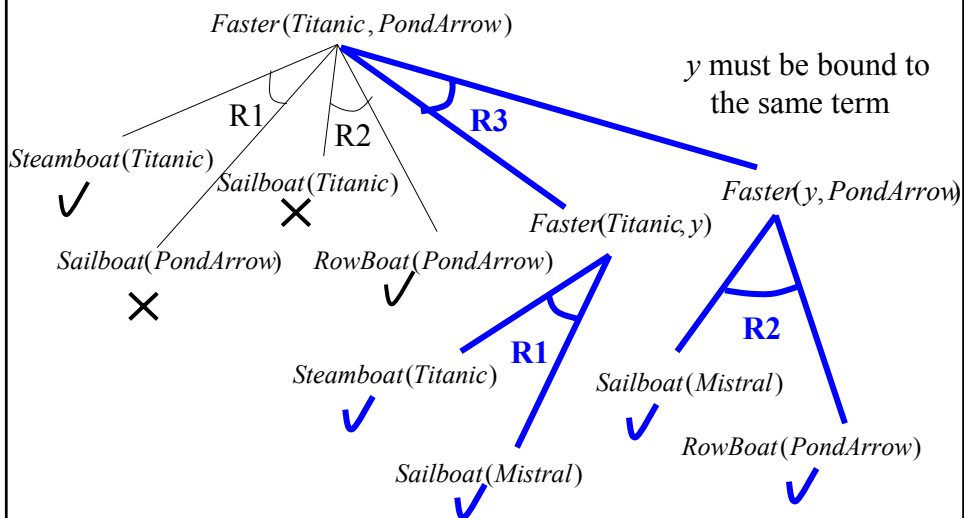

CS 1571 Intro to AI


Backward chaining

- The search tree: **AND/OR tree**
- Special search algorithms exists (including heuristics): AO, AO*

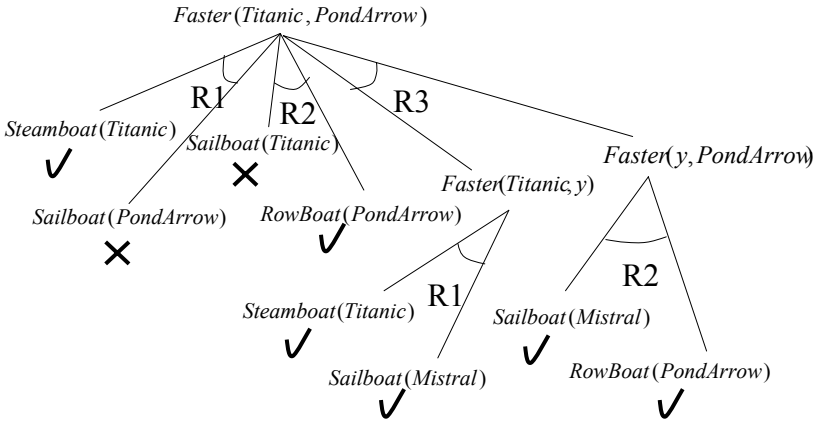

CS 1571 Intro to AI

Knowledge-based system





- **Knowledge base:**
 - A set of sentences that describe the world in some formal (representational) language (e.g. first-order logic)
 - Domain specific knowledge
- **Inference engine:**
 - A set of procedures that work upon the representational language and can infer new facts or answer KB queries (e.g. resolution algorithm, forward chaining)
 - Domain independent

CS 1571 Intro to AI

Automated reasoning systems

Examples and main differences:

- **Theorem provers**
 - Prove sentences in the first-order logic. Use inference rules, resolution rule and resolution refutation.
- **Deductive retrieval systems**
 - Systems based on rules (KBs in Horn form)
 - Prove theorems or infer new assertions (forward, backward chaining)
- **Production systems** 
 - Systems based on rules with actions in antecedents
 - Forward chaining mode of operation
- **Semantic networks** 
 - Graphical representation of the world, objects are nodes in the graphs, relations are various links

CS 1571 Intro to AI

Production systems

Based on rules, but different from KBs in the Horn form
Knowledge base is divided into:

- **A Rule base (includes rules)**
- **A Working memory (includes facts)**

A special type of if – then rule


$$p_1 \wedge p_2 \wedge \dots p_n \Rightarrow a_1, a_2, \dots, a_k$$

- **Antecedent:** a conjunction of literals
 - facts, statements in predicate logic
- **Consequent:** a conjunction of actions. An action can:
 - **ADD** the fact to the KB (working memory)
 - **REMOVE** the fact from the KB
 - **QUERY** the user, etc ...

CS 1571 Intro to AI

Production systems

- Use **forward chaining to do reasoning**:
 - If the antecedent of the rule is satisfied (rule is said to be “active”) then its consequent can be executed (it is “fired”)
- Problem**: Two or more rules are active at the same time.
Which one to execute next?



- Strategy for selecting the rule to be fired from among possible candidates is called **conflict resolution**

Production systems

- Why is conflict resolution important? Or, Why do we care about the order?
- Assume that we have two rules and the preconditions of both are satisfied:

R1: $A(x) \wedge B(x) \wedge C(y) \Rightarrow \text{add } D(x)$

R2: $A(x) \wedge B(x) \wedge E(z) \Rightarrow \text{delete } A(x)$

- What can happen if rules are triggered in different order?

Production systems

- Why is conflict resolution important? Or, Why do we care about the order?
- Assume that we have two rules and the preconditions of both are satisfied:

R1: $A(x) \wedge B(x) \wedge C(y) \Rightarrow \text{add } D(x)$

R2: $A(x) \wedge B(x) \wedge E(z) \Rightarrow \text{delete } A(x)$

- What can happen if rules are triggered in different order?
 - If R1 goes first, R2 condition is still satisfied and we infer $D(x)$
 - If R2 goes first we may never infer $D(x)$

Production systems

- **Problems with production systems:**
 - Additions and Deletions can change a set of active rules;
 - If a rule contains variables testing all instances in which the rule is active may require a large number of unifications.
 - Conditions of many rules may overlap, thus requiring to repeat the same unifications multiple times.
- **Solution: Rete algorithm**
 - gives more efficient solution for managing a set of active rules and performing unifications
 - Implemented in the system **OPS-5** (used to implement XCON – an expert system for configuration of DEC computers)

Rete algorithm

- Assume a set of rules:

$$A(x) \wedge B(x) \wedge C(y) \Rightarrow \text{add } D(x)$$

$$A(x) \wedge B(y) \wedge D(x) \Rightarrow \text{add } E(x)$$


$$A(x) \wedge B(x) \wedge E(z) \Rightarrow \text{delete } A(x)$$

- And facts: $A(1), A(2), B(2), B(3), B(4), C(5)$

- Rete:**

- Compiles the rules to a network that merges conditions of multiple rules together (avoid repeats)
- Propagates valid unifications
- Reevaluates only changed conditions

Rete algorithm. Network.

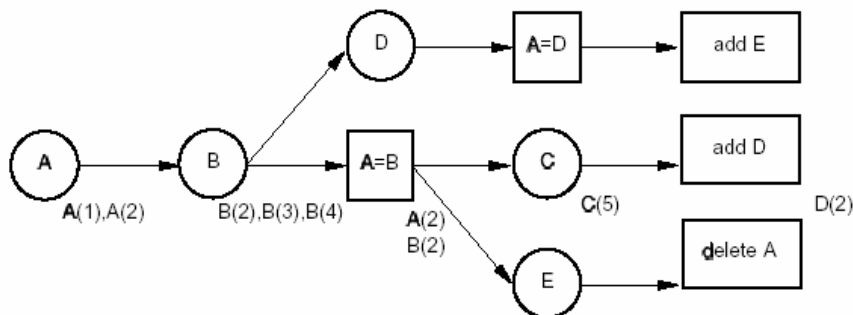

Rules: $A(x) \wedge B(x) \wedge C(y) \Rightarrow \text{add } D(x)$
 $A(x) \wedge B(y) \wedge D(x) \Rightarrow \text{add } E(x)$
 $A(x) \wedge B(x) \wedge E(z) \Rightarrow \text{delete } A(x)$

Facts: $A(1), A(2), B(2), B(3), B(4), C(5)$

Conflict resolution strategies


- **Problem:** Two or more rules are active at the same time. Which one to execute next?
- **Solutions:**
 - **No duplication** (do not execute the same rule twice)
 - **Recency.** Rules referring to facts newly added to the working memory take precedence
 - **Specificity.** Rules that are more specific are preferred.
 - **Priority levels.** Define priority of rules, actions based on expert opinion. Have multiple priority levels such that the higher priority rules fire first.

Semantic network systems

- Knowledge about the world described in terms of graphs. Nodes correspond to:
 - **Concepts or objects** in the domain.
- Links to relations. Three kinds:
 - **Subset links** (isa, part-of links)
 - **Member links** (instance links)
 - **Function links.**

} Inheritance relation links
- Can be transformed to the first-order logic language
- Graphical representation is often easier to work with
 - better overall view on individual concepts and relations

Semantic network. Example.

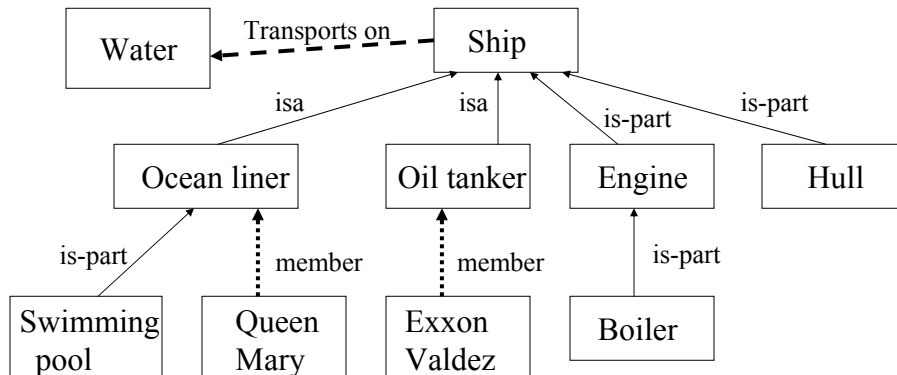

Inferred properties: *Queen Mary is a ship*
Queen Mary has a boiler